



SAMBORO


Pisos • Azulejos • Fachaletas



INTERIORES



ISLAS DE COCINA Y TOPS

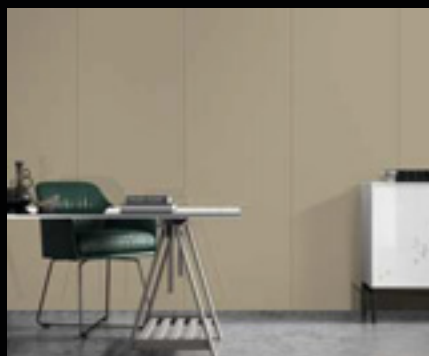

PARED, SUELO Y ESCALERA

Revoluciona los interiores y exteriores de tus espacios con los diseños que puedes utilizar como encimeras y decoración.

Estos modelos dan un aspecto único a cada rincón del espacio.



TOPS
PARA ESPACIOS
DE TRABAJO



UNIDADES
DE COCINA



TOPS
PARA
MESAS



ENCIMERAS
DE
LAVABO



PAREDES
Y PISOS



TOPS
PARA MESAS
DE COMEDOR

VARMORA

TILES • BATHWARE



ENCIMERAS
Y MUEBLES



PAREDES
Y PISOS



ALEATORIO

Descubre las infinitas posibilidades con las características únicas de las baldosas vitrificadas que se fusionan con el estilo de decoración de tus espacios versátiles.

El grosor funcional de 15 mm, permite que las baldosas se moldeen en varios perfiles de borde que mejoran el atractivo visual del espacio y sirven tanto para fines prácticos como estéticos.



15 mm de espesor



FÁCIL LIMPIEZA Y
CUIDADO



RESISTENTE AL
CHOQUE TÉRMICO



RESISTENTE
AL CALOR



RESISTENTE
A MANCHAS



COLORES RESISTENTES A LA
LUZ



RESISTENTE A
QUÍMICOS
DOMÉSTICOS



RESISTENCIA A
LOS RAYONES



NO ABSORBE
LÍQUIDOS



RESISTENTE
A IMPACTOS



ANTIDESLIZANTE



IMPRESIÓN
DIGITAL



ECO
FRIENDLY



CERO
MANTENIMIENTO



RESISTENCIA
A LA ABRASIÓN



ALEATORIO

Disponible en:



SAMBORO

Pisos • Azulejos • Fachaletas



VARMORA

TILES • BATHWARE

ÍNDICE

BELLEZA DOVE PULIDO	6
BELLEZA WHITE MATE.....	7
BELLEZA WHITE PULIDO	7
BELLEZA ZED BLACK MATE	8
BELLEZA ZED BLACK PULIDO	8
BLACK PETAL PULIDO.....	9
CARRARA LEXO PULIDO	10
ESTRADA PULIDO	11
KINAWA BEIGE PULIDO.....	12
MARQUINA NERO PULIDO	13
ROCKLAND GREY PULIDO	14
ROCKLAND NERO PULIDO.....	15
ROCKLAND SILVER PULIDO	16
ESPECIFICACIONES TÉCNICAS.....	17

Disponible en:




SAMBORO

Pisos • Azulejos • Fachaletas




BELLEZA DOVE PULIDO
80X260 cm



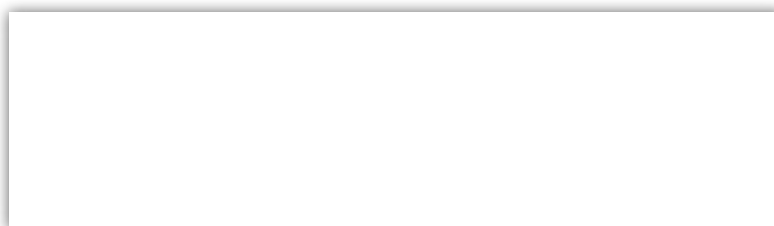


BELLEZA WHITE MATE
80X260 cm

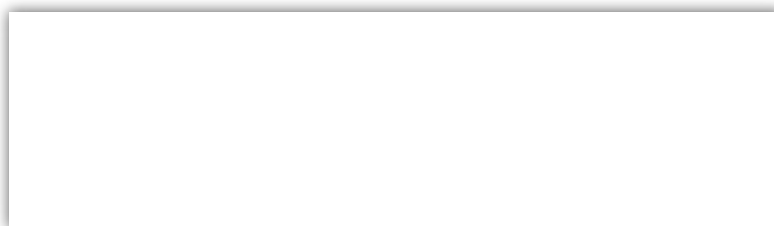


BELLEZA WHITE PULIDO
80X260 cm






BELLEZA ZED BLACK MATE
80X260 cm



BELLEZA ZED BLACK PULIDO
80X260 cm



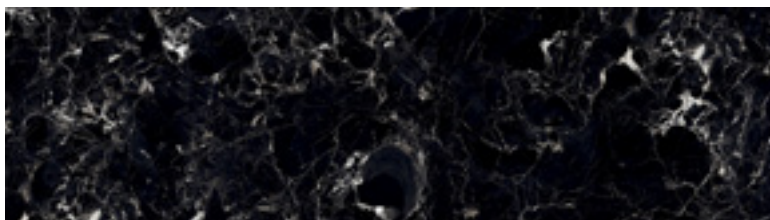


BLACK PETAL PULIDO
80X260 cm



CARRARA LEXO PULIDO
80X260 cm



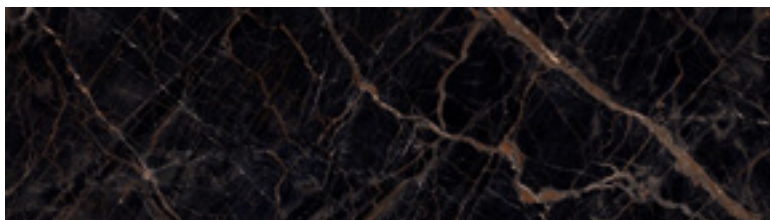

ESTRADA PULIDO
80X260 cm




KINAWA BEIGE PULIDO
80X260 cm






MARQUINA NERO PULIDO
80X260 cm

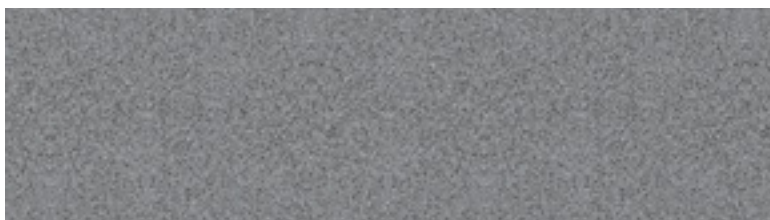


ROCKLAND GREY PULIDO
80X260 cm



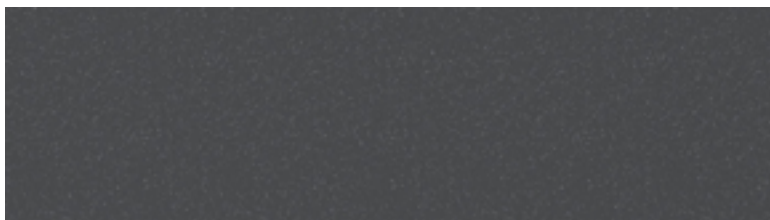

ROCKLAND NERO PULIDO
80X260 cm



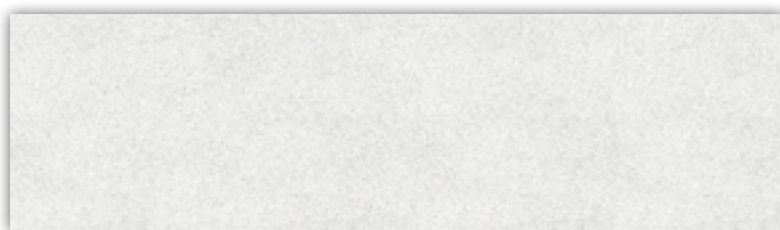

ROCKLAND SILVER PULIDO
80X260 cm



ESPECIFICACIONES TÉCNICAS

SR. NO.	CHARACTERISTIC	TEST METHOD	IS 15622 :2017 (GROUP B I a)	VARMORA VALUE
A	DIMENSION & SURFACE QUALITY			
1	Deviation in Length & Width	IS - 13630 - 1	± 0.10%	± 0.10%
2	Deviation in Thickness	IS - 13630 - 1	± 5.00%	± 3.50%
3	Straightness of sides	IS - 13630 - 1	± 0.10%	± 0.10%
4	Rectangularity	IS - 13630 - 1	± 0.10%	± 0.10%
5	Surface Flatness	IS - 13630 - 1	± 0.50%	± 0.20%
6	Surface Quality	IS - 13630 - 1	Minimum 95 % of tiles shall be free from visible defects	95%
B	PHYSICAL PROPERTIES			
1	Water Absorption	IS - 13630 - 2	≤0.08%,Avg.	0.06%,Avg.
2	Modulus of Rapture(N/mm ²)	IS - 13630 - 6	Avg. 35 N/mm ²	Avg. 40 N/mm ²
3	Breaking Strength (N)	IS - 13630 - 6		
4	Moisture Expansion (mm/m)	IS - 13630 - 3	0.02 Max.	0.01 Max.
5	Scratch Hardness of Surface (Moh' Scale)	IS - 13630 - 13	5, Min	5, Min*
6	Resistance of Surface Abrasion (Glazed tiles)	IS - 13630 - 11	Class II, Min.	Class IV
7	Co-efficient of linear thermal expansion	IS - 13630 - 4	6x10 ⁻⁶ , Max	6x10 ⁻⁶ , Max
8	Thermal Shock Resistance	IS - 13630 - 5	10 Cycles, Min	10 Cycles, Pass
9	Crazing Resistance	IS - 13630 - 9	4 Cycles at 7.5 Bar, Min	4 Cycles, Pass
10	Impact Resistance-Coefficient of Restitution	IS - 13630 - 14	0.55, Min	0.55, Min
11	Coefficient of Friction	-	Manufacturer Norms	Manufacturer Norms
12	Frost Resistance	IS - 13630 - 10	Manufacturer Norms	No Damage
13	Resistance to Deep Abrasion for Unglazed Tiles (mm ³)	IS - 13630 - 12	140,Max	140,Max
14	Bulk Density (g/cc)	IS - 13630 - 2	2.2, Min	2.3, Min
C	CHEMICAL PROPERTIES			
1	Resistance to Staining	IS - 13630 - 8	Glaze - Class 1,Min Unglaze - Class 2,Min	Glaze & Unglaze - Class 2,Min
2	Resistance to Household Chemicals	IS - 13630 - 8	Glaze - Class AA,Min Unglaze -Required If agreed according to chemical resistance class indicated by manufacturer	Class AA
3	Resistance to Acids & Alkalis	IS - 13630 - 8	Glaze & Unglaze -Required If agreed according to chemical resistance class indicated by manufacturer	Resistance



SAMBORO

Pisos • Azulejos • Fachaletas



www.samboro.com